



ssc-inc.com 

## Enclosure Gates


SSC appreciates the opportunity to provide your facility with garbage and recycling service. To better serve you, we have detailed info below concerning enclosure gates. We prefer enclosures without gates. If gates will be used, please contact us to discuss your site's specific needs and limitations.

**SSC Recycling Manager**

Rodd Pemble, [rodd@ssc-inc.com](mailto:rodd@ssc-inc.com) or (360) 734-3490

**Gate opening** must be 11-12 feet clear for direct truck access to one (1) container and 18 feet for two (2) containers, otherwise roll-out charges will apply (see [Pack Out Service](#)). Gates should open 180 degrees from closed position if truck drives in and there is less than 24" clear on both sides of container. If 24" clear, gates may open to 90 degrees from closed. A 40" access gate for Toters® and customers reduces wear on large gates. If gates are opened and closed by driver, charges apply for driver time (see [Gate Service](#)).

**Gate stops** are 30" long, 3/4" O.D. steel bar, sliding in two sleeves (1.25" I.D.) welded to gate frame. Please weld on anti-theft spur between sleeves, rest shelf on frame so bolt can be raised and turned 1/4 turn to rest while gate is moved. Stops should drop into lined 1.5" O.D. hole drilled through slab into permeable layer for drainage. Please do NOT use center drop gate posts with integral "U" hasp - they get bent and hurt folks!

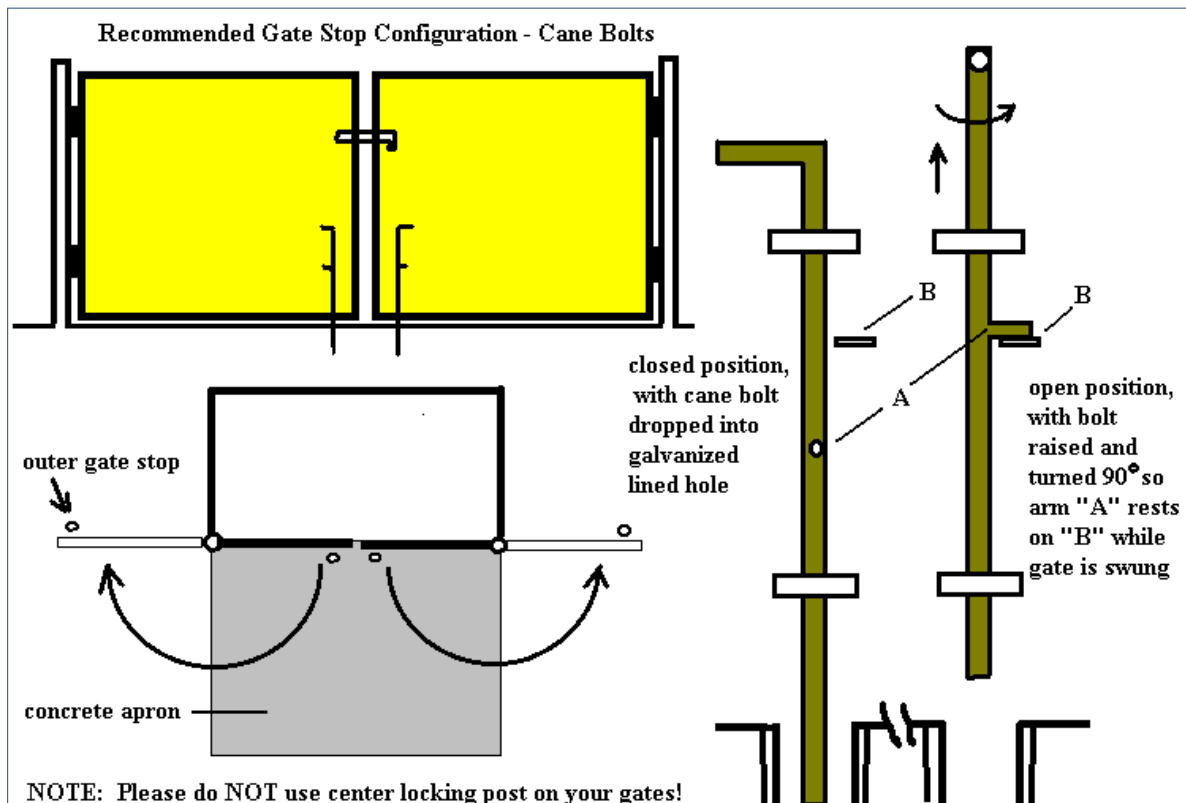

[ssc@ssc-inc.com](mailto:ssc@ssc-inc.com)

360.734.3490

24 Hour Dispatch 360.734.2051